


DRUM/BARREL PUMPS  
DRUM PUMP KITS

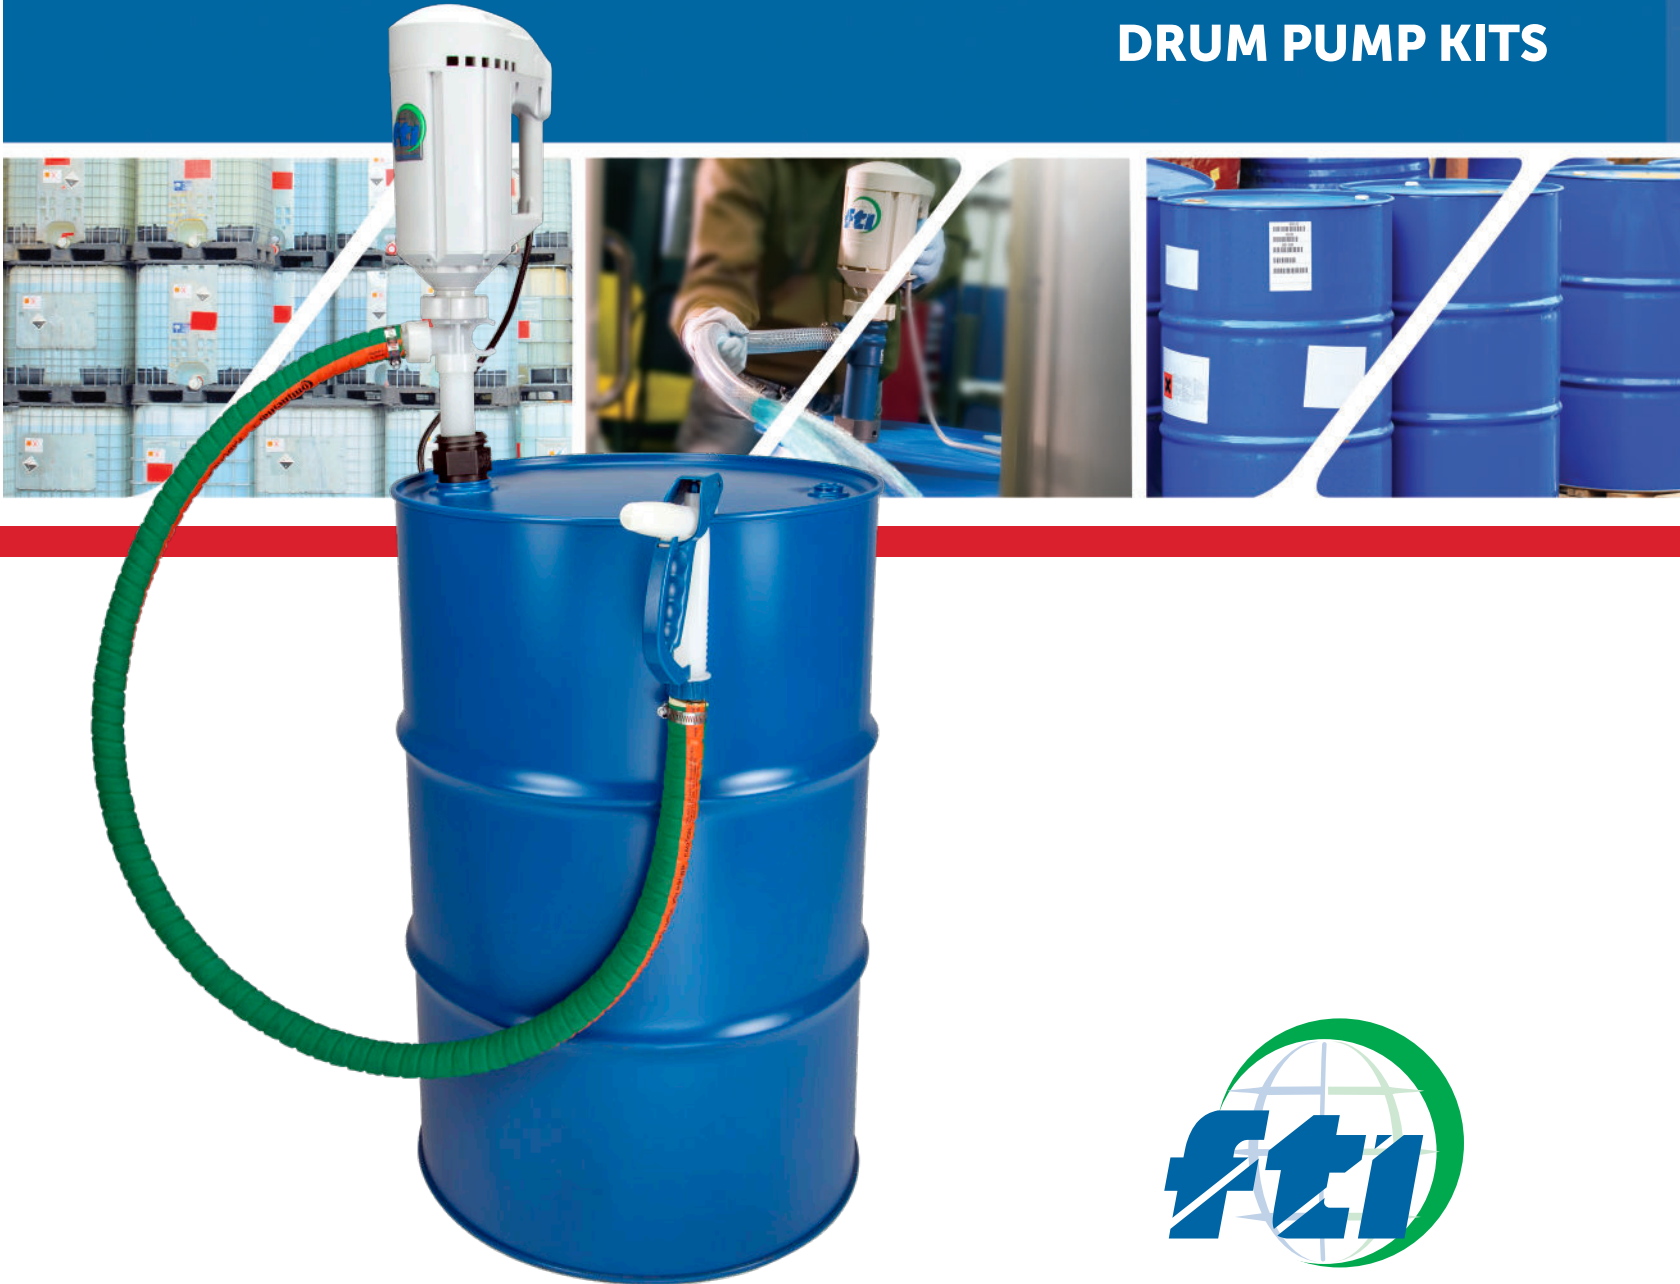

**FINISH THOMPSON INC.**

[finishthompson.com](http://finishthompson.com)

PUMPING SOLUTIONS AROUND THE WORLD

# DRUM PUMP KITS

Finish Thompson offers engineered drum pump solutions based on specific classes of chemicals, container types and flow ranges.

Kits contain everything in one convenient carton.

**INCLUDES:**

- Drum pump tube
- Motor
- Discharge tubing
- Nozzle
- Wall bracket
- Additional accessories depending upon model

## Benefits of Powered Pumps

Powered container transfer pumps offer multiple benefits:



**Risk reduction** - Designed to withstand harsh chemicals and keep them safely contained during transfers, effectively mitigating employee and company risk.



**Versatility** - Available in models for high and low volume transfer, various levels of specific gravity/viscosity and diverse chemical-handling capabilities, for a full range of pumping solutions.




**Portability** - Easily transported for various tasks throughout a facility, with minimal footprint to conserve space or for use in smaller settings.



**Speed** - Able to transfer high volumes of fluids quickly and effectively to improve productivity and boost the bottom line.



**Durability** - Offering longevity and low maintenance throughout an extended lifespan, reducing cost and operating smoothly for prolonged periods – even under harsh conditions.

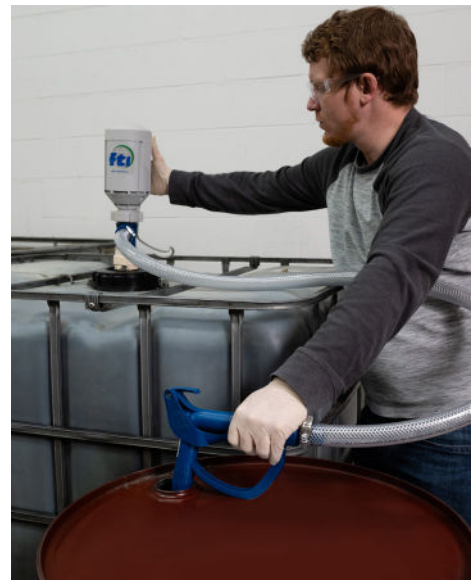

## Motor Types

- **Splash-proof/open drip proof (IP24)** - Economical and lighter weight than other electric motors, they are protected in every direction from water splashes. Depending upon kit type, they are either variable speed or two speed to allow for precise dispensing of the fluid.



- **Enclosed/TEFC (IP54/55)** - This type is sealed against water splashes, dust and corrosive fumes. Best choice for use with fuming chemicals and dusty environments. Features variable speed solid state control with chemical resistant touch pad for precise fluid dispensing and superior motor protection against overload and over temperature.

- **Explosion-proof (IP54/55)** - This style is sealed against corrosive fumes, water splashes, and dust. Has the added benefit of being appropriate for hazardous areas and are suitable for use with flammable or combustible liquids. Features variable speed solid state control with chemical resistant touch pad for precise fluid dispensing and superior motor protection against overload and over temperature.



- **Air** - This motor style is compact and lightweight compared to electric motors. Because this type of motor offers non-electrical operation, they are generally considered acceptable for use in hazardous areas and for use with flammable or combustible liquids. Included air flow adjustment valve allows for variable speed.

- **Lithium-ion battery (IP24)** - The ultimate in portability and convenience, the cordless design makes it easy to transfer fluids virtually anywhere. Can pump up to 450 gallons (1,703 liters) on a single charge. Two speeds to allow for precise dispensing of the fluid.



# DRUM PUMP KITS

## Hose Types

- **Fiber Reinforced PVC** - Features broad chemical resistance including alkalis and weak acids, excellent abrasion resistance and is very flexible. High tensile strength polyester reinforcing mesh for outstanding strength.



- **Ultra-high molecular weight polyethylene (UHMWPE)** - Features outstanding chemical resistance against most chemicals including extremely aggressive ones. The cover is EPDM and the reinforcement is spiral-plied synthetic fabric with double wire helix.

- **Conductive ultra-high molecular weight polyethylene (UHMWPE)** - Features outstanding chemical compatibility against a wide range of solvents. Inner tube is conductive UHMWPE, cover is conductive EPDM and the reinforcement is spiral-plied synthetic fabric with double wire helix.



- **EPDM for Diesel Exhaust Fluid (DEF)/AdBlue** - DEF/AdBlue is a key component of selective catalytic reduction (SCR) systems, which help diesel vehicles meet stringent emission regulations. Hose features a compound that is specially formulated with low extraction EPDM and peroxide cured to provide superior extraction levels to significantly reduce contamination.

- **FDA Compliant Nitrile Rubber/Buna-N** - Features FDA Compliant white nitrile rubber/Buna-N inner tube with a super abrasion and oil-resistant cover with spiral synthetic yarn reinforcement and Microban® antimicrobial protection.



- **Nozzles** - Nozzles allow precise control of liquid flow. Most of the kits feature plastic nozzles designed and manufactured by Finish Thompson. They are molded from chemical-resistant unfilled polypropylene or PVDF plastics and have no wetted metallic parts. The mineral oil and flammable liquid kits feature an aluminum nozzle.

- **Bung Adapters** - A bung adapter helps keep the pump tube and motor in an upright position in the container.



- **Wall Hanger** - Wall hangers allow the pump to be stored out of the way in an upright position when not in use.

- **Container Size to Pump Tube Length** - The size of the container affects the length of the pump tube required for the application.

- 30/55-gallon (120/200 liter) Drums/barrels = 40" (102cm) tube length
- 275-gallon (1,040 liter) IBCs/totes = 48" (122cm) tube length



## TABLE OF CONTENTS:

• Non-Corrosive to Mildly Corrosive Liquids .....	4-5	• Mineral Oil .....	10
• Corrosive Liquids .....	6-7	• Flammable Liquid .....	11-12
• Extremely Corrosive Liquids .....	8	• Diesel Exhaust Fluid (DEF) / AdBlue .....	13
• Water Treatment Chemicals .....	9	• FDA Compliant Materials .....	14-15

# NON-CORROSIVE TO MILDLY CORROSIVE LIQUIDS - MEDIUM VOLUME TRANSFER EF SERIES KITS



## APPLICATIONS

Cleaners, detergents, fabric softners, machine shop coolants, antifreeze and more

## FEATURES

- Polypropylene tube with FKM elastomers
- 316 stainless steel shaft
- Built-in strainer
- Polypropylene nozzle
- 5 feet flexible reinforced PVC hose
- Molded wall mount for pump storage
- Choice of 115-volt or 230-volt 2 speed electric, 2 speed 12-volt lithium-ion battery or air drive motor



## PERFORMANCE DATA

Maximum Flow <sup>1</sup>			Maximum Head <sup>1</sup>			Max. Specific Gravity <sup>‡</sup>	Maximum Viscosity		
Elec. gpm (lpm)	Air gpm (lpm)	12V gpm (lpm)	Elec. ft (m)	Air ft (m)	12V ft (m)		Elec.	Air	12V
17 (64.4)	15 (56.8)	14 (53.0)	20 (6.1)	17 (5.2)	13 (4.0)	1.6	300 cP	300 cP	100 cP

<sup>1</sup>All testing performed with water at 68°F (20°C). Actual performance can vary by +/- 10%. Actual performance will decrease with increased fluid viscosity and specific gravity.


<sup>‡</sup>Max. specific gravity is dependent on fluid viscosity. Refer to Specific Gravity Maximums table & curve below.

## VISCOSITY DATA

Electric/Air Motor				12V Motor		
Viscosity (cP)	100	200	300	Viscosity (cP)	50	100
Max Flow gpm (lpm)	7 (26)	5 (19)	4 (14)	Max Flow gpm (lpm)	7 (26)	3 (11)
Max Head ft (m)	16 (5)	16 (5)	16 (5)	Max Head ft (m)	11 (3)	14 (4)

Note: Viscosity data is based on motors operating at high speed.

Maximum Performance Limits			
High Speed Motor Setting			
If specific gravity is:	viscosity cannot exceed:		
	S1, S2, S3, S4	S6	
1.0	300 cP	100 cP	
1.1	300 cP	50 cP	
1.2	125 cP	1 cP	
1.6	1 cP	-	
Low Speed Motor Setting			
If specific gravity is:	viscosity cannot exceed:		
	S1, S2, S3	S6	
1.0	100 cP	25 cP	
1.2	75 cP	25 cP	
1.6	1 cP	25 cP	

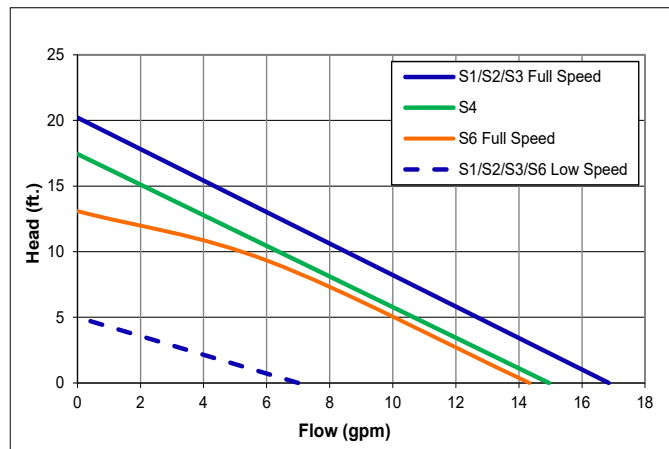

Kit Number	Tube Length	Motor Type
111615	40" (102 cm)	2 Speed, 115-volt 60 Hz, electric, ODP/IP24, QPS
111616	40" (102 cm)	2 Speed, 230-volt 50/60 Hz, electric, ODP/IP24, QPS
111617	40" (102 cm)	2 Speed, 12-volt cordless lithium-ion battery, ODP/IP24 w/ USA plug charger, CE
111618	40" (102 cm)	2 Speed, 12-volt cordless lithium-ion battery, ODP/IP24 w/ EU plug charger, CE
111619	40" (102 cm)	2 Speed, 12-volt cordless lithium-ion battery, ODP/IP24 w/ 12v car adapter, CE
111620	40" (102 cm)	Variable speed air motor, air requirements = 40 psi @ 27 cfm



# NON-CORROSIVE TO MILDLY CORROSIVE LIQUIDS - HIGH VOLUME TRANSFER PF SERIES KITS



## APPLICATIONS

Cleaners, detergents, fabric softners, machine shop coolants, antifreeze and more

## FEATURES

- Polypropylene tube with FKM elastomers
- 316 stainless steel shaft
- 6-foot flexible reinforced PVC hose
- Polypropylene nozzle
- Wall mount for pump storage
- Bung adapter
- Choice of 115-volt or 230-volt electric, or air drive motor





## PERFORMANCE DATA

Maximum Flow <sup>1</sup>		Maximum Head <sup>1</sup>		Max. Specific Gravity <sup>2</sup>	Maximum Viscosity	
Elec. gpm (lpm)	Air gpm (lpm)	Elec. ft (m)	Air ft (m)		Elec.	Air
40 (151)	22 (83)	80 (24)	38 (11.6)	1.8	500 cP	330 cP

## VISCOSITY DATA

Viscosity (cP)	100	250	500
Max Flow gpm (lpm)	24 (91)	16 (61)	11 (42)
Max Head ft (m)	52 (16)	51 (16)	48 (15)

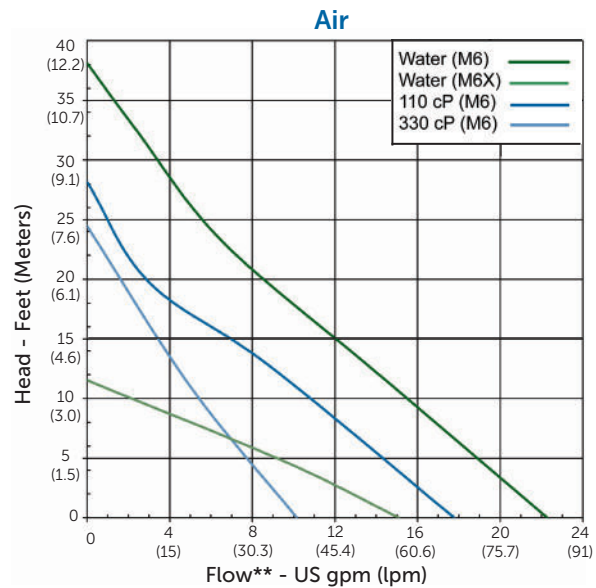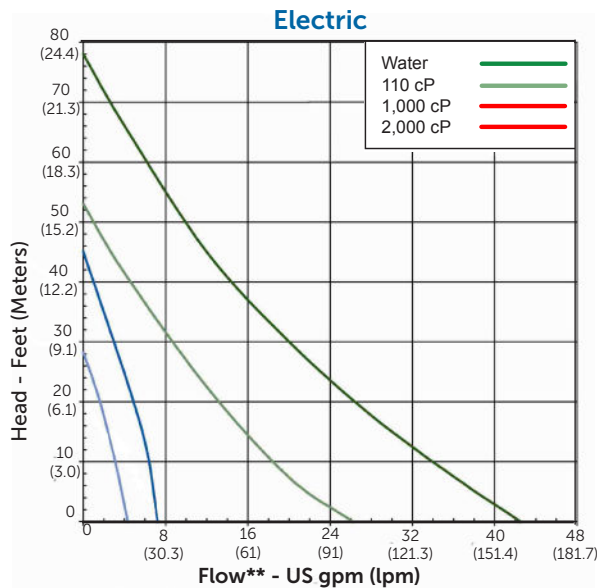

Kit Number	Tube Length	Motor Type
111639	40" (102 cm)	Variable speed, 115-volt 60 Hz, electric, ODP/IP24, QPS
111640	48" (122 cm)	Variable speed, 115-volt 60 Hz, electric, ODP/IP24, QPS
111641	40" (102 cm)	Variable speed, 230-volt 50/60 Hz, electric, ODP/IP24, CE
111642	48" (122 cm)	Variable speed, 230-volt 50/60 Hz, electric, ODP/IP24, CE
111643	40" (102 cm)	Variable speed air motor, air requirements = 80-100 psi @ 15-32 cfm, CE
111644	48" (122 cm)	Variable speed air motor, air requirements = 80-100 psi @ 15-32 cfm, CE

# CORROSIVE LIQUIDS - MEDIUM VOLUME TRANSFER EF SERIES KITS



## APPLICATIONS

Acids, bases, plating solutions, water treatment chemicals like sodium hypochlorite

## FEATURES

- Pure polypropylene/PVDF tube with FKM elastomers and Alloy 625 shaft
- Built-in strainer
- 5-foot ultra-high molecular weight polyethylene hose
- PVDF nozzle
- Molded wall mount for pump storage
- Choice of 115-volt or 230-volt 2 speed electric, 2 speed 12-volt lithium-ion battery or air drive motor



## PERFORMANCE DATA


Maximum Flow <sup>1</sup>			Maximum Head <sup>1</sup>			Max. Specific Gravity <sup>2</sup>	Maximum Viscosity		
Elec. gpm (lpm)	Air gpm (lpm)	12V gpm (lpm)	Elec. ft (m)	Air ft (m)	12V ft (m)		Elec.	Air	12V
17 (64.4)	15 (56.8)	14 (53.0)	20 (6.1)	17 (5.2)	13 (4.0)	1.6	300 cP	300 cP	100 cP

## VISCOSITY DATA

Electric/Air Motor				12V Motor		
Viscosity (cP)	100	200	300	Viscosity (cP)	50	100
Max Flow gpm (lpm)	7 (26)	5 (19)	4 (14)	Max Flow gpm (lpm)	7 (26)	3 (11)
Max Head ft (m)	16 (5)	16 (5)	16 (5)	Max Head ft (m)	11 (3)	14 (4)

Note: Viscosity data is based on motors operating at high speed.

Maximum Performance Limits		
High Speed Motor Setting		
If specific gravity is:	viscosity cannot exceed:	
	S1, S2, S3, S4	S6
1.0	300 cP	100 cP
1.1	300 cP	50 cP
1.2	125 cP	1 cP
1.6	1 cP	-
Low Speed Motor Setting		
If specific gravity is:	viscosity cannot exceed:	
	S1, S2, S3	S6
1.0	100 cP	25 cP
1.2	75 cP	25 cP
1.6	1 cP	25 cP

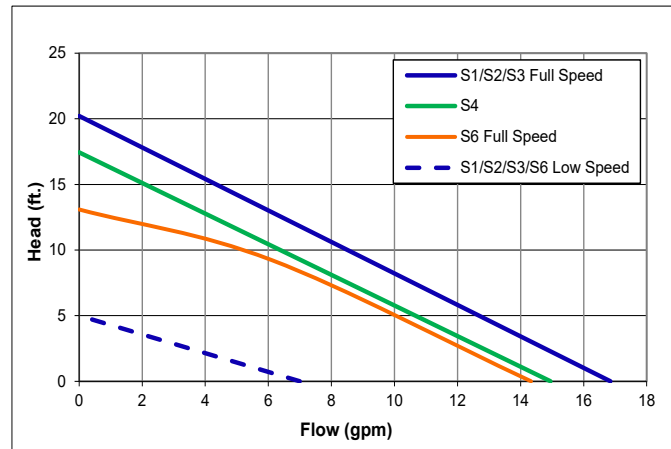

Kit Number	Tube Length	Motor Type
111621	40" (102 cm)	2 Speed, 115-volt 60 Hz, electric, ODP/IP24, QPS
111622	40" (102 cm)	2 Speed, 230-volt 50/60 Hz, electric, ODP/IP24, QPS
111623	40" (102 cm)	2 Speed, 12-volt cordless lithium-ion battery, ODP/IP24 w/ USA plug charger, CE
111624	40" (102 cm)	2 Speed, 12-volt cordless lithium-ion battery, ODP/IP24 w/ EU plug charger, CE
111625	40" (102 cm)	2 Speed, 12-volt cordless lithium-ion battery, ODP/IP24 w/ 12v car adapter, CE
111626	40" (102 cm)	Variable speed air motor, air requirements = 40 psi @ 27 cfm

# CORROSIVE LIQUIDS - HIGH VOLUME TRANSFER PF SERIES KITS



## APPLICATIONS

Acids, bases, plating solutions

## FEATURES



- Polypropylene tube with FKM elastomers and Alloy 625 shaft
- 6-feet flexible reinforced PVC hose
- Polypropylene nozzle
- Wall mount for pump storage
- Bung adapter
- Choice of 115-volt or 230-volt electric, or air drive motor

## PERFORMANCE DATA

Maximum Flow <sup>1</sup>		Maximum Head <sup>1</sup>		Max. Specific Gravity <sup>2</sup>	Maximum Viscosity	
Elec. gpm (lpm)	Air gpm (lpm)	Elec. ft (m)	Air ft (m)		Elec.	Air
40 (151)	22 (83)	80 (24)	38 (11.6)	1.8	500 cP	330 cP

## VISCOSITY DATA

Viscosity (cP)	100	250	500
Max Flow gpm (lpm)	24 (91)	16 (61)	11 (42)
Max Head ft (m)	52 (16)	51 (16)	48 (15)

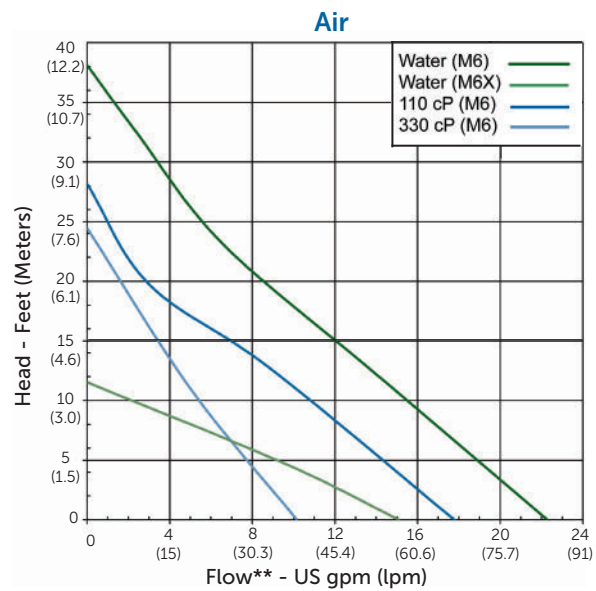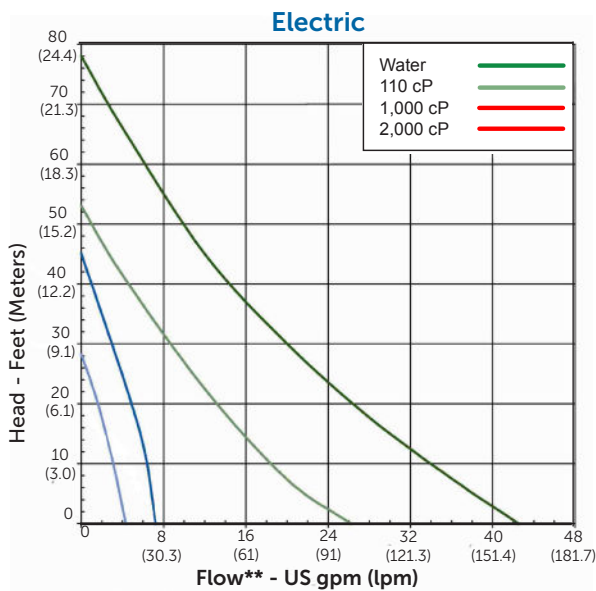

Kit Number	Tube Length	Motor Type
111645	40" (102 cm)	Variable speed, 115-volt 60 Hz, electric, ODP/IP24, QPS
111646	48" (122 cm)	Variable speed, 115-volt 60 Hz, electric, ODP/IP24, QPS
111647	40" (102 cm)	Variable speed, 230-volt 50/60 Hz, electric, ODP/IP24, CE
111648	48" (122 cm)	Variable speed, 230-volt 50/60 Hz, electric, ODP/IP24, CE
111649	40" (102 cm)	Variable speed air motor, air requirements = 80-100 psi @ 15-32 cfm, CE
111650	48" (122 cm)	Variable speed air motor, air requirements = 80-100 psi @ 15-32 cfm, CE

# EXTREMELY CORROSIVE LIQUIDS - HIGH VOLUME TRANSFER PF SERIES KITS



## APPLICATIONS

Chromic, 60%+ sulfuric, nitric and hydrofluoric acids, hydrogen peroxide, sodium hypochlorite

## FEATURES



- Pure PVDF tube with FKM elastomers and Alloy 625 shaft
- 6-foot ultra-high molecular weight polyethylene hose
- PVDF nozzle
- Wall mount for pump storage
- Bung adapter
- Choice of 115-volt or 230-volt electric, or air drive motor

## PERFORMANCE DATA

Maximum Flow <sup>1</sup>		Maximum Head <sup>1</sup>		Max. Specific Gravity <sup>2</sup>	Maximum Viscosity	
Elec. gpm (lpm)	Air gpm (lpm)	Elec. ft (m)	Air ft (m)		Elec.	Air
40 (151)	22 (83)	80 (24)	38 (11.6)	1.8	2,000 cP	330 cP

## VISCOSITY DATA

Viscosity (cP)	100	250	500	1000	2000
Max Flow gpm (lpm)	24 (91)	16 (61)	11 (42)	7 (26)	4 (15)
Max Head ft (m)	52 (16)	51 (16)	48 (15)	45 (14)	28 (9)

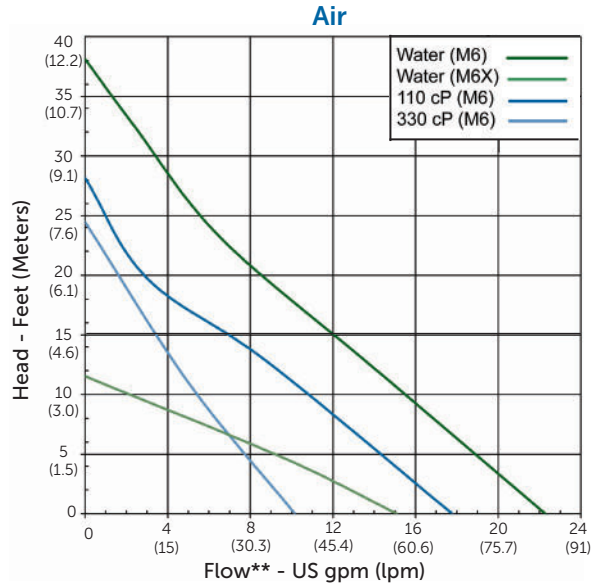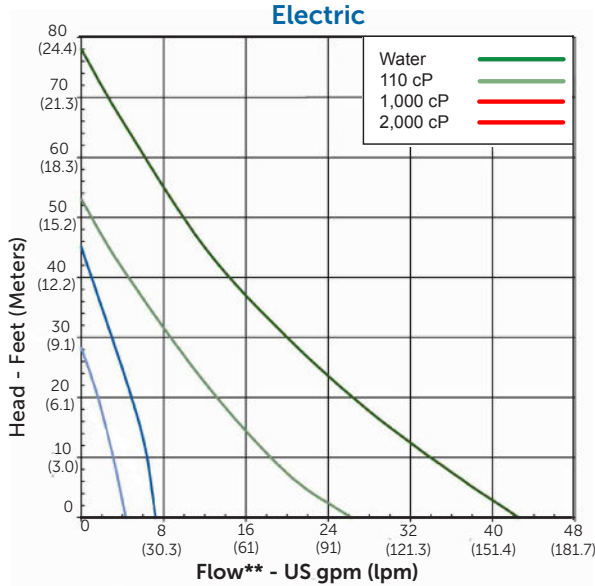

Kit Number	Tube Length	Motor Type
111651	40" (102 cm)	Variable speed, 115-volt 60 Hz, electric, TEFC/IP55, QPS
111652	48" (122 cm)	Variable speed, 115-volt 60 Hz, electric, TEFC/IP55, QPS
111653	40" (102 cm)	Variable speed, 230-volt 50/60 Hz, electric, TEFC/IP55, CE
111654	48" (122 cm)	Variable speed, 230-volt 50/60 Hz, electric, TEFC/IP55, CE
111655	40" (102 cm)	Variable speed air motor, air requirements = 80-100 psi @ 15-32 cfm, CE
111656	48" (122 cm)	Variable speed air motor, air requirements = 80-100 psi @ 15-32 cfm, CE



# WATER TREATMENT CHEMICALS - HIGH VOLUME TRANSFER SF SERIES KITS

(for medium transfer see "Corrosive Liquids - Medium Volume Transfer Kits")



## APPLICATIONS

Aluminum sulfate, ferric chloride, hydrochloric acid, hydrofluosilicic acid, PAC, permanganates, sodium bisulfate, sodium hypochlorite

## FEATURES

- Pure polypropylene/PVDF tube with FKM elastomers
- Alloy 625 shaft
- Built in strainer
- 6-foot ultra-high molecular weight polyethylene hose
- PVDF nozzle
- Wall mount for pump storage
- Bung adapter
- Choice of 115-volt or 230-volt electric, or air drive motor





## PERFORMANCE DATA

Maximum Flow <sup>1</sup>		Maximum Head <sup>2</sup>		Max. Specific Gravity <sup>3</sup>		Maximum Viscosity	
Elec. gpm (lpm)	Air gpm (lpm)	Elec. ft (m)	Air ft (m)	Elec.	Air	Elec.	Air
37 (140)	31 (117)	50 (15)	32 (10)	1.84	2.0	1,000 cP	1200 cP

## VISCOSITY DATA

Viscosity (cP)	100	500	1000	1,200
Max Flow gpm (lpm)	23 (87)	8 (30)	4 (15)	2 (8)
Max Head ft (m)	48 (15)	44 (13)	44 (13)	37 (11)

Note: Electric motors up to 1,000 cP.  
Air motors up to 1,200 cP.

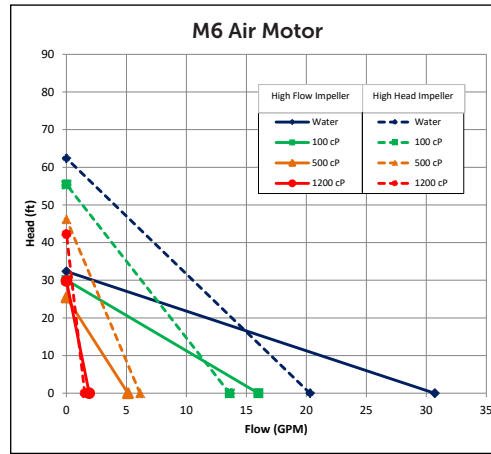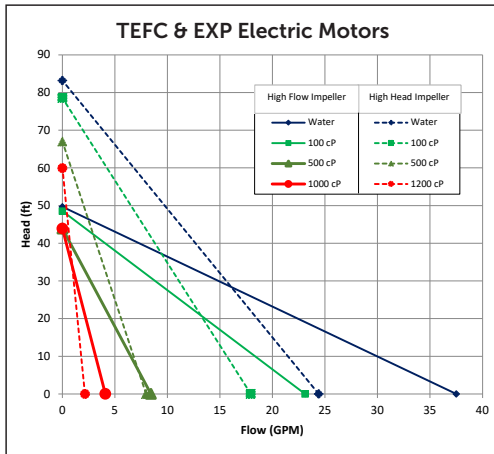

Kit Number	Tube Length	Motor Type
111666	40" (102 cm)	Variable speed, 115-volt 60 Hz, electric, TEFC/IP55, QPS
111667	48" (122 cm)	Variable speed, 115-volt 60 Hz, electric, TEFC/IP55, QPS
111668	40" (102 cm)	Variable speed, 230-volt 50/60 Hz, electric, TEFC/IP55, CE
111669	48" (122 cm)	Variable speed, 230-volt 50/60 Hz, electric, TEFC/IP55, CE
111670	40" (102 cm)	Variable speed air motor, air requirements = 80-100 psi @ 15-32 cfm, CE
111671	48" (122 cm)	Variable speed air motor, air requirements = 80-100 psi @ 15-32 cfm, CE

# MINERAL OIL - MEDIUM VOLUME TRANSFER EF SERIES KITS



## APPLICATIONS

Mineral oils, cleaners, detergents, fabric softeners, machine shop coolants, antifreeze and more

## FEATURES

- 316 stainless steel tube with FKM elastomers
- 316 stainless steel shaft
- 5-foot flexible reinforced PVC hose
- Aluminum nozzle
- Molded wall mount for pump storage
- Choice of 115-volt or 230-volt 2 speed electric, 2 speed 12-volt lithium-ion battery or air drive motor



## PERFORMANCE DATA

Maximum Flow <sup>1</sup>			Maximum Head <sup>1</sup>			Max. Specific Gravity <sup>2</sup>	Maximum Viscosity		
Elec. gpm (lpm)	Air gpm (lpm)	12V gpm (lpm)	Elec. ft (m)	Air ft (m)	12V ft (m)		Elec.	Air	12V
17 (64.4)	15 (56.8)	14 (53.0)	20 (6.1)	17 (5.2)	13 (4.0)	1.6	300 cP	300 cP	100 cP

<sup>1</sup>All testing performed with water at 68°F (20°C). Actual performance can vary by +/- 10%. Actual performance will decrease with increased fluid viscosity and specific gravity.


<sup>2</sup>Max. specific gravity is dependent on fluid viscosity. Refer to Specific Gravity Maximums table & curve below.

## VISCOSITY DATA

Electric/Air Motor				12V Motor		
Viscosity (cP)	100	200	300	Viscosity (cP)	50	100
Max Flow gpm (lpm)	7 (26)	5 (19)	4 (14)	Max Flow gpm (lpm)	7 (26)	3 (11)
Max Head ft (m)	16 (5)	16 (5)	16 (5)	Max Head ft (m)	11 (3)	14 (4)

Note: Viscosity data is based on motors operating at high speed.

Maximum Performance Limits		
High Speed Motor Setting		
If specific gravity is:	viscosity cannot exceed:	
	S1, S2, S3, S4	S6
1.0	300 cP	100 cP
1.1	300 cP	50 cP
1.2	125 cP	1 cP
1.6	1 cP	-
Low Speed Motor Setting		
If specific gravity is:	viscosity cannot exceed:	
	S1, S2, S3	S6
1.0	100 cP	25 cP
1.2	75 cP	25 cP
1.6	1 cP	25 cP

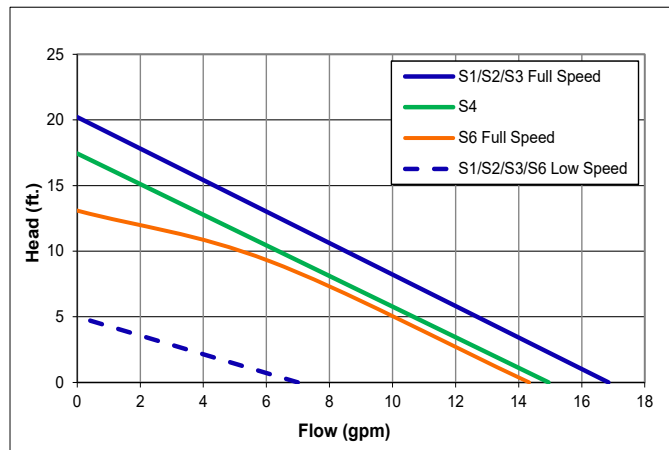

Kit Number	Tube Length	Motor Type
111627	40" (102 cm)	2 Speed, 115-volt 60 Hz, electric, ODP/IP24, QPS
111628	40" (102 cm)	2 Speed, 230-volt 50/60 Hz, electric, ODP/IP24, CE
111629	40" (102 cm)	2 Speed, 12-volt cordless lithium-ion battery, ODP/IP24 w/ USA plug charger, CE
111630	40" (102 cm)	2 Speed, 12-volt cordless lithium-ion battery, ODP/IP24 w/ EU plug charger, CE
111631	40" (102 cm)	2 Speed, 12-volt cordless lithium-ion battery, ODP/IP24 w/ 12v car adapter, CE
111632	40" (102 cm)	Variable speed air motor, air requirements = 40 psi @ 27 cfm

# FLAMMABLE LIQUID - MEDIUM VOLUME TRANSFER EF SERIES KITS



## APPLICATIONS

Alcohols, toluene, xylene, acetone, methyl ethyl ketone (MEK), lacquer thinner

## FEATURES

- 316 stainless steel tube with FFKM elastomers for outstanding chemical compatibility with a wide range of solvents
- 316 stainless steel shaft
- 5-foot conductive solvent resistant ultra-high molecular weight polyethylene (UHMWPE) hose
- Grounding cable
- Aluminum nozzle
- Wall mount for pump storage
- Air drive motor



## PERFORMANCE DATA

Maximum Flow <sup>1</sup>	Maximum Head <sup>1</sup>	Max. Specific Gravity <sup>2</sup>	Maximum Viscosity
Air gpm (lpm)	Air ft (m)		Air
15 (56.8)	17 (5.2)	1.6	300 cP


<sup>1</sup>All testing performed with water at 68°F (20°C). Actual performance can vary by +/- 10%. Actual performance will decrease with increased fluid viscosity and specific gravity.

<sup>2</sup>Max. specific gravity is dependent on fluid viscosity. Refer to Specific Gravity Maximums table & curve below.

## VISCOSITY DATA

Electric/Air Motor			
Viscosity (cP)	100	200	300
Max Flow gpm (lpm)	7 (26)	5 (19)	4 (14)
Max Head ft (m)	16 (5)	16 (5)	16 (5)

Note: Viscosity data is based on motors operating at high speed.

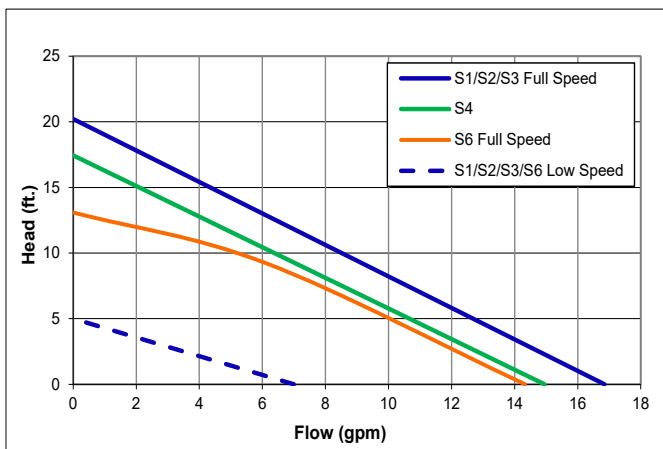

Kit Number	Tube Length	Motor Type
111633	40" (102 cm)	Variable speed air motor, air requirements = 40 psi @ 27 cfm, CE

# FLAMMABLE LIQUID - HIGH VOLUME TRANSFER PF SERIES KITS



## APPLICATIONS

Alcohols, toluene, xylene, acetone, methyl ethyl ketone (MEK), lacquer thinner

## FEATURES

- 316 stainless steel tube with FFKM elastomers for outstanding chemical compatibility with a wide range of solvents
- 316 stainless steel shaft
- Grounding cable
- Aluminum nozzle
- 6-foot conductive solvent resistant ultra-high molecular weight polyethylene (UHMWPE) hose
- Wall mount for pump storage
- Bung adapter
- Choice of 115-volt or 230-volt explosion proof electric, or air drive motor





## PERFORMANCE DATA

Maximum Flow <sup>1</sup>		Maximum Head <sup>1</sup>		Max. Specific Gravity <sup>2</sup>	Maximum Viscosity	
Elec. gpm (lpm)	Air gpm (lpm)	Elec. ft (m)	Air ft (m)		Elec.	Air
40 (151)	22 (83)	80 (24)	38 (11.6)	1.8	2,000 cP	330 cP

## VISCOSITY DATA

Viscosity (cP)	100	250	500	1000	2000
Max Flow gpm (lpm)	24 (91)	16 (61)	11 (42)	7 (26)	4 (15)
Max Head ft (m)	52 (16)	51 (16)	48 (15)	45 (14)	28 (9)

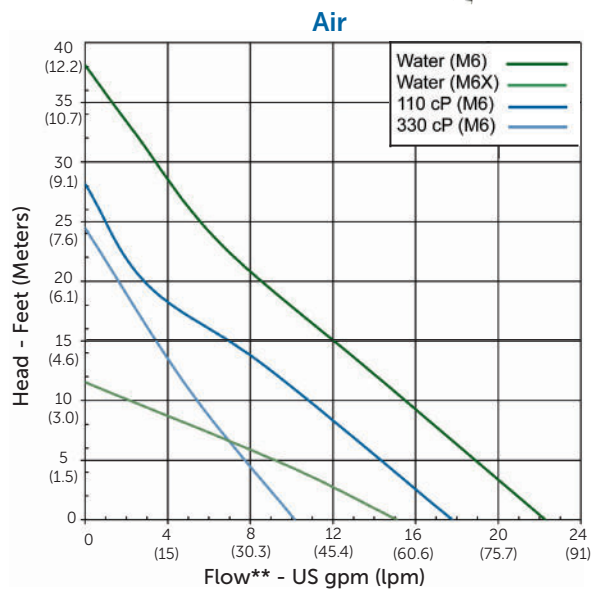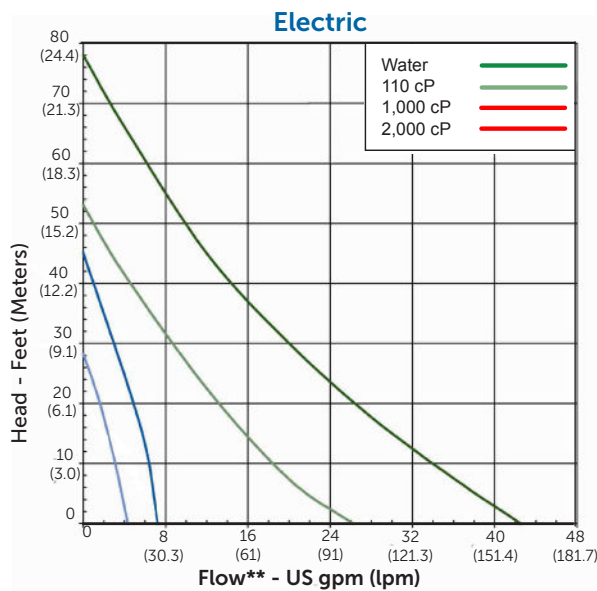

Kit Number	Tube Length	Motor Type
111657	40" (102 cm)	Variable speed, 115-volt 60 Hz, electric, TEFC/IP55, explosion proof, Class I, Div. 1, Gr D, T4, QPS
111658	48" (122 cm)	Variable speed, 115-volt 60 Hz, electric, TEFC/IP55, explosion proof, Class I, Div. 1, Gr D, T4, QPS
111659	40" (102 cm)	Variable speed, 230-volt 50/60 Hz, electric, TEFC/IP55, explosion proof, CE/ATEX/IECEx Ex II 2G Ex db ib IIB T5 Gb
111660	48" (122 cm)	Variable speed, 230-volt 50/60 Hz, electric, TEFC/IP55, explosion proof, CE/ATEX/IECEx Ex II 2G Ex db ib IIB T5 Gb
111661	40" (102 cm)	Variable speed air motor, air requirements = 80-100 psi @ 15-32 cfm, CE
111662	48" (122 cm)	Variable speed air motor, air requirements = 80-100 psi @ 15-32 cfm, CE



# DIESEL EXHAUST FLUID (DEF) / ADBLUE - MEDIUM VOLUME TRANSFER EF SERIES KITS

Provides economical, safe transfer from a variety of containers into the vehicle's on-board storage tank while maintaining the strict purity requirements for DEF/AdBlue (ISO 22241-3).

## FEATURES

- Polypropylene tube with EPDM elastomers
- 316 stainless steel shaft
- 8-foot flexible EPDM DEF rated hose
- Polypropylene nozzle with 3/4"/19mm spout
- Special sealed bung adapter prevents dust, dirt and other contaminants from entering the drum
- Molded wall mount for pump storage
- Choice of 115-volt or 230-volt 2 speed electric, 2 speed 12-volt lithium-ion battery or air drive motor



## PERFORMANCE DATA

Maximum Flow <sup>1</sup>			Maximum Head <sup>1</sup>			Max. Specific Gravity <sup>2</sup>	Maximum Viscosity		
Elec. gpm (lpm)	Air gpm (lpm)	12V gpm (lpm)	Elec. ft (m)	Air ft (m)	12V ft (m)		Elec.	Air	12V
17 (64.4)	15 (56.8)	14 (53.0)	20 (6.1)	17 (5.2)	13 (4.0)	1.6	300 cP	300 cP	100 cP

<sup>1</sup>All testing performed with water at 68°F (20°C). Actual performance can vary by +/- 10%. Actual performance will decrease with increased fluid viscosity and specific gravity.


<sup>2</sup>Max. specific gravity is dependent on fluid viscosity. Refer to Specific Gravity Maximums table & curve below.

## VISCOSITY DATA

Electric/Air Motor				12V Motor		
Viscosity (cP)	100	200	300	Viscosity (cP)	50	100
Max Flow gpm (lpm)	7 (26)	5 (19)	4 (14)	Max Flow gpm (lpm)	7 (26)	3 (11)
Max Head ft (m)	16 (5)	16 (5)	16 (5)	Max Head ft (m)	11 (3)	14 (4)

Note: Viscosity data is based on motors operating at high speed.

Maximum Performance Limits		
High Speed Motor Setting		
If specific gravity is:	viscosity cannot exceed:	
	S1, S2, S3, S4	S6
1.0	300 cP	100 cP
1.1	300 cP	50 cP
1.2	125 cP	1 cP
1.6	1 cP	-
Low Speed Motor Setting		
If specific gravity is:	viscosity cannot exceed:	
	S1, S2, S3	S6
1.0	100 cP	25 cP
1.2	75 cP	25 cP
1.6	1 cP	25 cP

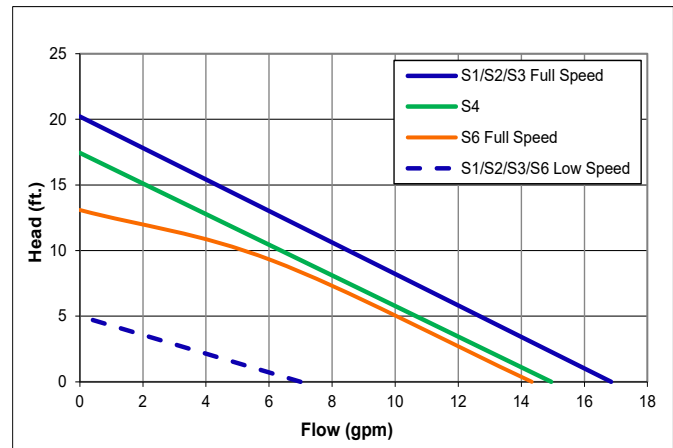

Kit Number	Tube Length	Motor Type
111634	40" (102 cm)	2 speed, 115-volt 60 Hz, electric, ODP/IP24, QPS
111635	40" (102 cm)	2 speed, 230-volt 50/60 Hz, electric, ODP/IP24, CE
111636	40" (102 cm)	2 speed, 12-volt cordless lithium-ion battery, ODP/IP24 w/ USA plug charger, CE
111637	40" (102 cm)	2 speed, 12-volt cordless lithium-ion battery, ODP/IP24 with EU plug charger, CE
111638	40" (102 cm)	2 speed, 12-volt cordless lithium-ion battery, ODP/IP24 w/ 12v car adapter, CE

# FDA COMPLIANT MATERIALS - MEDIUM VOLUME TRANSFER TT SERIES KITS

FDA-compliant (non-sanitary) pumps are specifically constructed of materials safe for food, beverage, pharmaceutical and cosmetic processes where 3A or USDA standards are not required.



## FEATURES

- Features 316 stainless steel tube with hex nut design which allows the lower tube to be easily removed (nut contains FDA neoprene gasket)
- PTFE internals
- 316 stainless steel shaft
- 1" Tri-Clamp connection
- 6-foot flexible FDA compliant hose w/ nitrile inner and oil resistant w/Microban outer jacket
- 1" Tri-clamp x 1" hose barb with clamp and FDA Buna gasket
- FDA polypropylene nozzle with FDA Buna O-rings
- Wall mount for pump storage
- Bung adapter
- Choice of 115-volt or 230-volt, or air drive motor

## PERFORMANCE DATA



Maximum Flow <sup>1</sup>		Maximum Head <sup>1</sup>		Max. Specific Gravity <sup>2</sup>	Maximum Viscosity	
Elec. gpm (lpm)	Air gpm (lpm)	Elec. ft (m)	Air ft (m)		Elec.	Air
10 (38)	16 (61)	10 (3)	30 (9)	1.8	50 cP	2,000 cP

<sup>1</sup>All testing performed with water at 68°F (20°C). Actual performance can vary by +/- 10%. Actual performance will decrease with increased fluid viscosity and specific gravity.

## VISCOSITY DATA

Viscosity (cP)	100	250	500	1000	2000
Max Flow gpm (lpm)	7 (26)	6 (23)	3 (11)	4 (15)	3 (11)
Max Head ft (m)	25 (8)	35 (11)	48 (15)	60 (18)	73 (32)

Note: Electric motors: 100-500 cP. M6X: 500-2,000 cP

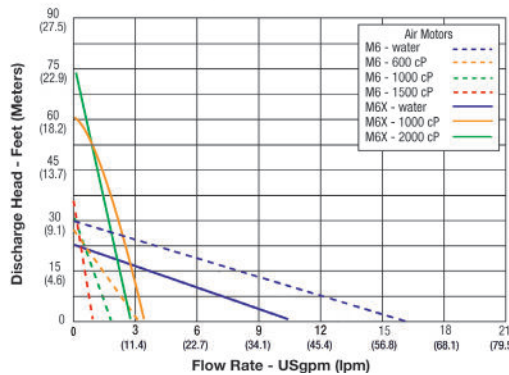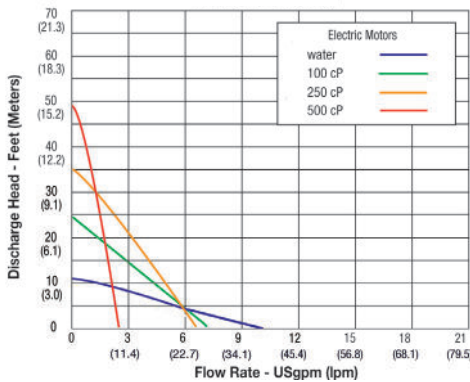

Kit Number	Tube Length	Motor Type
111678	40" (102 cm)	Variable speed, 115-volt 60 Hz, electric, TEFC/IP55, QPS
111679	40" (102 cm)	Variable speed, 230-volt 50/60 Hz, electric, TEFC/IP55, CE
111680	40" (102 cm)	Variable speed air motor, air requirements = 80-100 psi @ 15-32 cfm, CE

# FDA COMPLIANT MATERIALS - HIGH VOLUME TRANSFER PF SERIES KITS

FDA-compliant (non-sanitary) pumps are specifically constructed of materials safe for food, beverage, pharmaceutical and cosmetic processes where 3A or USDA standards are not required.



## FEATURES



- 316 stainless steel tube with FDA Buna elastomers for outstanding chemical compatibility with a wide range of solvents
- 316 stainless steel shaft
- 1" Tri-Clamp connection
- 6-foot flexible FDA compliant hose w/ nitrile inner and oil resistant w/Microban outer jacket
- Bung adapter
- 1" Tri-clamp x 1" hose barb with clamp and FDA Buna gasket
- FDA polypropylene nozzle with FDA Buna O-rings
- Wall mount for pump storage
- Choice of 115-volt or 230-volt, or air drive motor

## PERFORMANCE DATA

Maximum Flow <sup>1</sup>		Maximum Head <sup>1</sup>		Max. Specific Gravity <sup>2</sup>	Maximum Viscosity	
Elec. gpm (lpm)	Air gpm (lpm)	Elec. ft (m)	Air ft (m)		Elec.	Air
40 (151)	22 (83)	80 (24)	38 (11.6)	1.8	2,000 cP	330 cP

## VISCOSITY DATA

Viscosity (cP)	100	250	500	1000	2000
Max Flow gpm (lpm)	24 (91)	16 (61)	11 (42)	7 (26)	4 (15)
Max Head ft (m)	52 (16)	51 (16)	48 (15)	45 (14)	28 (9)

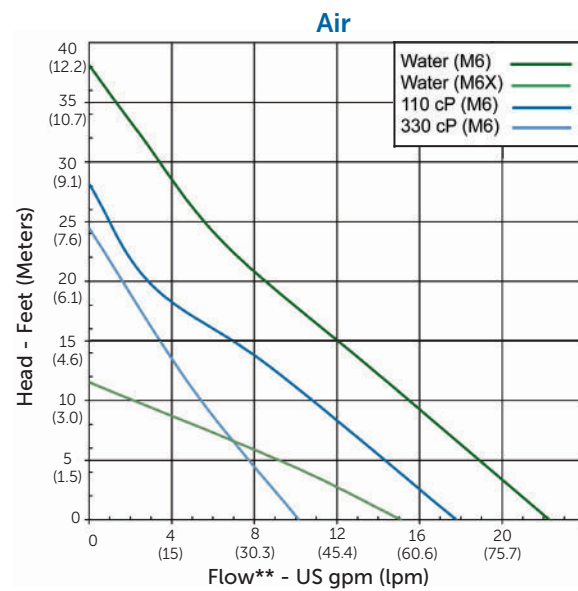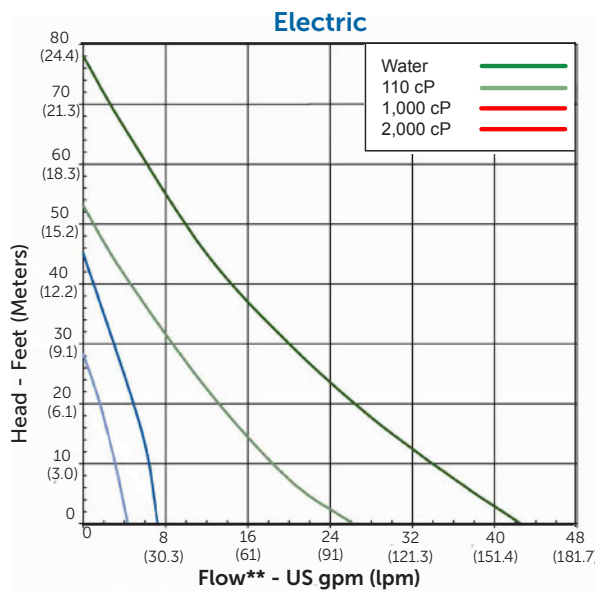

Kit Number	Tube Length	Motor Type
111672	40" (102 cm)	Variable speed, 115-volt 60 Hz, electric, ODP/IP24, QPS
111673	48" (122 cm)	Variable speed, 115-volt 60 Hz, electric, ODP/IP24, QPS
111674	40" (102 cm)	Variable speed, 230-volt 50/60 Hz, electric, ODP/IP24, CE
111675	48" (122 cm)	Variable speed, 230-volt 50/60 Hz, electric, ODP/IP24, CE
111676	40" (102 cm)	Variable speed air motor, air requirements = 80-100 psi @ 15-32 cfm, CE
111677	48" (122 cm)	Variable speed air motor, air requirements = 80-100 psi @ 15-32 cfm, CE

## OTHER GREAT PRODUCTS FROM FINISH THOMPSON




**UC SERIES**  
ANSI DIMENSIONAL  
MAGNETIC DRIVE PUMPS



**DB & SP SERIES**  
PREMIUM MAGNETIC  
DRIVE SEALLESS  
CENTRIFUGAL PUMPS



**AP SERIES**  
SEALED STAINLESS  
STEEL CENTRIFUGAL  
PUMPS



**MSDB SERIES**  
PREMIUM MULTI-STAGE  
MAGNETIC  
DRIVE SEALLESS  
CENTRIFUGAL PUMPS



**GP SERIES**  
SEALED PLASTIC  
CENTRIFUGAL PUMPS



**VKC SERIES**  
VERTICAL MAGNETIC  
DRIVE SEALLESS  
CENTRIFUGAL PUMPS



[finishthompson.com](http://finishthompson.com)

**FINISH THOMPSON INC. - HEADQUARTERS**

921 Greengarden Road | Erie, PA 16501  
800.934.9384 | ph 814.455.4478 | fx 814.455.8518  
email [fti@finishthompson.com](mailto:fti@finishthompson.com)

**FINISH THOMPSON GmbH- EUROPE CENTER**

Otto-Hahn-Strasse 16 | Maintal, D-63477 Germany  
49 (0)6181-90878-0 | fx 49 (0)6181-90878-18  
email [fti@finishthompson.com](mailto:fti@finishthompson.com)